



FLORY
TRACTOR MOUNT
V-SWEEPER AND
2X62 BLOWER



FLORY TRACTOR MOUNT

V-SWEEPER AND 2X62 BLOWER

FEATURES

- The Flory Tractor Mount V-Sweeper combined with the 2X62 Blower maximizes the speed and efficiency of harvest by reducing the number of sweeping passes, machines and operators required
- In-cab push-button adjustment of sweeping reels, brushes, blower dampers and spouts
- One-touch button automatically lowers sweeper heads, which hydraulically float to follow the terrain
- Heads and blower use 3-point mounts to easily connect and disconnect from the tractor
- Proven sturdy 5 bar head and "Align-Mount" reel for extended bearing and reel life
- Now includes dust containment curtain for sweeper heads (not shown)
- Turn signals and flashers for improved road safety


OPTIONS

2X62

- Blower Spout Type
(Shown with Berm Spouts)
- Tractor or Stand Alone Hydraulics

TMV

- Head Size (See Table)
- Berm Brushes on Heads

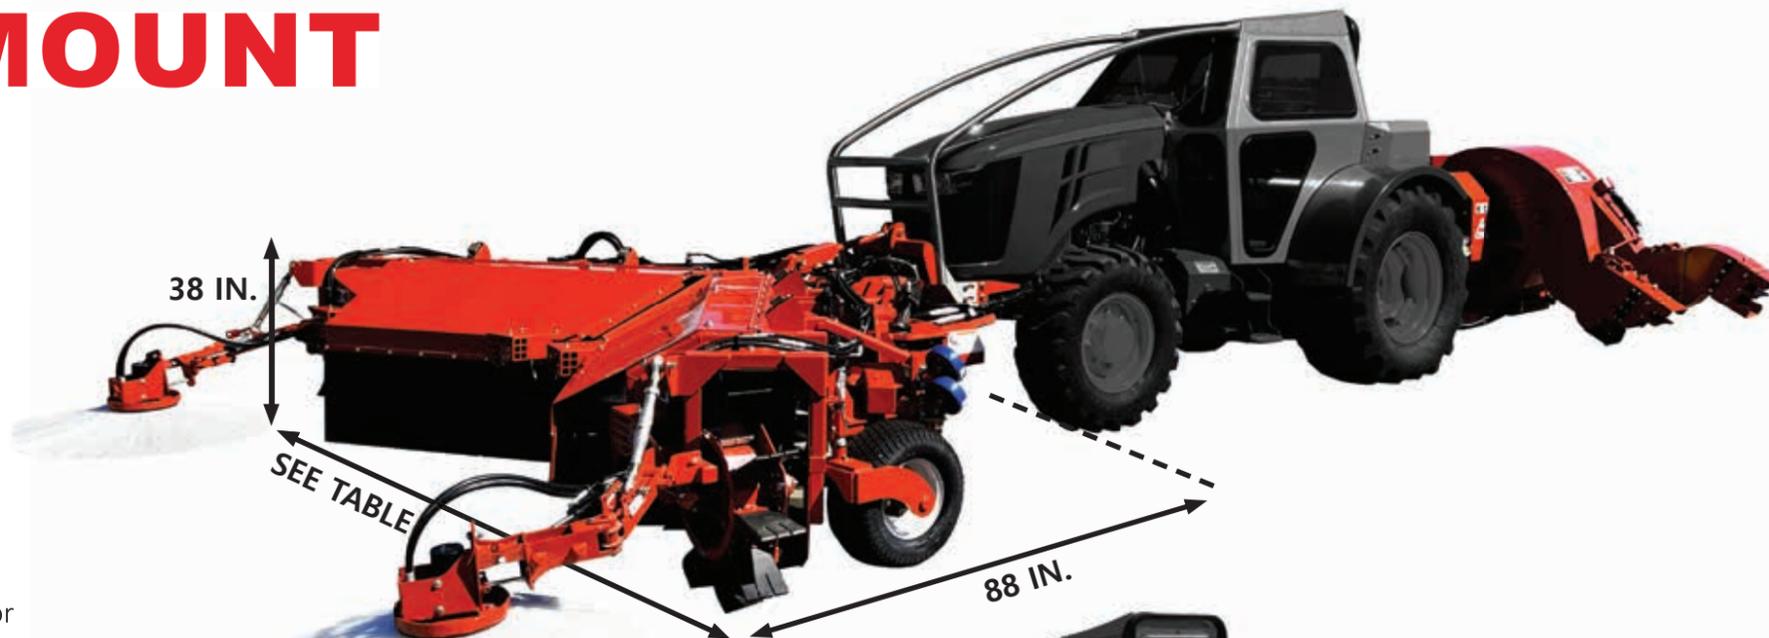

SPECIFICATIONS

PTO SPEED	1,000 RPM
MIN. PTO HP.	90 HP (TMV AND BLOWER) 60 HP (BLOWER ONLY)
MIN. HYD. SUPPLY	20 GPM, 1,500 PSI (TMV ONLY)
TMV HYD. OIL CAPACITY	6 GAL.
TMV WEIGHT	3,600 LBS. (WITH 5-5 HEADS)
BLOWER HYD. OIL CAPACITY	6 GAL. TOTAL / 4.4 GAL. IN TANK
BLOWER WEIGHT	2,200 LBS. (WITH POWER PACK)
BLOWER AIR OUTPUT	UP TO 146 MPH, 26,050 CFM TOTAL

SWEEPING WIDTHS

MODEL	HEAD SIZE	RECOMMENDED TREE ROW SPACING (FT.)				
		19	20	21	22	23
TMV44V62	DUAL 4.5 FT. + BRUSHES					
TMV55V62	DUAL 5.5 FT. + BRUSHES					

NOTE: MAY VARY DEPENDING ON CONDITIONS